



Hose Reel

Model HR2250



Features:

- The reel's primary purpose is to dispense or collect fluid circulation hose on job sites.
- Available with 375' foot 3/4" I.D. hose packages.
- Independent modular design offers the following advantages over built-in reels; You have the choice of storing the hose reel at a secure location on or off the job site when not in use. Allows deployment of hose at more than one job site.

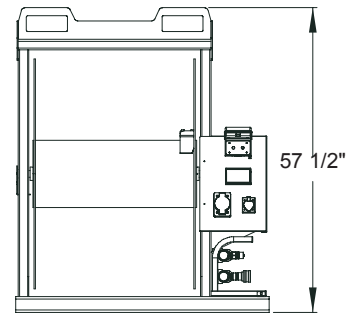

Specifications

- Controls..... rotational speed - 15 RPM
forward / reverse
foot switch activation
- Power requirements.....115 VAC, 11 F.L. AMPS
- Motor.....1,800 RPM, 3/4 HP, 1-phase, totally enclosed
- Gear box.....102-1 reduction
- Load.....forklift & sling
- Tarp cover..... weather and UV protection for the fluid circulation hose
- Fluid distribution manifold...6-port, detachable (sold separately)
- Thaw/cure hose loops..... 3/4" (1"O.D.) x 375' hose loops with 3/4" hydraulic-style quick couplers.
- Weight..... with 4 thaw/cure hose loops - 1,386 lbs.
with 6 thaw/cure hose loops - 1,826 lbs.
- Hose coverage examples
- 4 loops @ 18" spacing2,250 sq. ft.
- 6 loops @ 18" spacing3,375 sq. ft.



Heat Thaw Cure Dry